


## NP6-2.8Ah 6V2.8Ah

### Specifications


Nominal Voltage		6V
Rated capacity (20 hour rate)		2.8Ah
Dimensions	Length	66±1mm(2.60inch)
	Width	33±1mm(1.30inch)
	Height	97±1mm(3.82inch)
	Total Height	103±1mm(4.06inch)
Approx. Weight		0.48kg(1.06lbs)±5%



### Outer dimensions (mm)

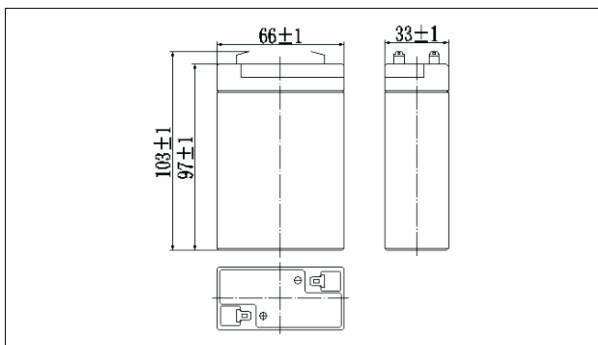

### Terminal Type (mm)

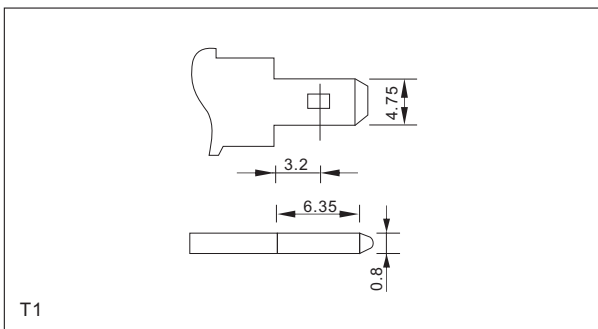

### Characteristics

Capacity (25°C)	20HR(3.50V)	2.8Ah
	10HR(3.50V)	2.6Ah
	1HR(3.20V)	1.8Ah
Terminal type		T1
Internal resistance (Fully charged,25°C)		Approx.27m Ω
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 months	Remaining Capacity:91%
	6 months	Remaining Capacity:82%
	12 months	Remaining Capacity:65%
Nominal operating temperature		25°C ±3°C(77°F ±5°F)
Operating temperature range	Discharge	-15°C~50°C(5°F~122°F)
	Charge	-10°C~50°C(14°F~122°F)
	Storage	-20°C~50°C(-4°F~122°F)
Float charging voltage(25°C)		6.80 to 6.90V Temperature compensation: -9mV/°C
Cyclic charging voltage(25°C)		7.25 to 7.50V Temperature compensation: -15mV/°C
Maximum charging current		0.84A
Maximum discharge current		42A(5 sec.)
Designed floating life(20°C)		5 years

### Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

### Constant Current Discharge Characteristics Unit:A(25°C,77°F)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
4.80V	10.7	6.78	5.29	2.98	1.83	1.00	0.69	0.57	0.49	0.27	0.14
4.95V	10.4	6.57	5.16	2.92	1.81	1.00	0.69	0.57	0.49	0.26	0.14
5.10V	9.95	6.30	4.97	2.83	1.76	0.99	0.69	0.57	0.48	0.26	0.14
5.25V	9.52	6.03	4.81	2.76	1.73	0.97	0.68	0.56	0.48	0.26	0.14
5.40V	8.98	5.69	4.55	2.66	1.67	0.95	0.66	0.55	0.46	0.26	0.14


### Constant Power Discharge Characteristics Unit:W(25°C,77°F)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	4h	5h	10h	20h
4.80V	59.7	38.2	30.2	17.1	10.6	5.87	4.12	3.42	2.92	1.59	0.85
4.95V	57.9	37.1	29.4	16.7	10.5	5.83	4.10	3.40	2.90	1.58	0.85
5.10V	55.5	35.5	28.4	16.2	10.2	5.78	4.07	3.37	2.88	1.58	0.85
5.25V	53.1	34.0	27.4	15.8	10.0	5.70	4.04	3.35	2.86	1.57	0.84
5.40V	50.1	32.1	25.9	15.3	9.68	5.55	3.92	3.25	2.77	1.54	0.82


Note: The above characteristics data can be obtained within three charge or discharge cycles.

## NP6-2.8Ah 6V2.8Ah


### ● Discharge characteristics(25°C)

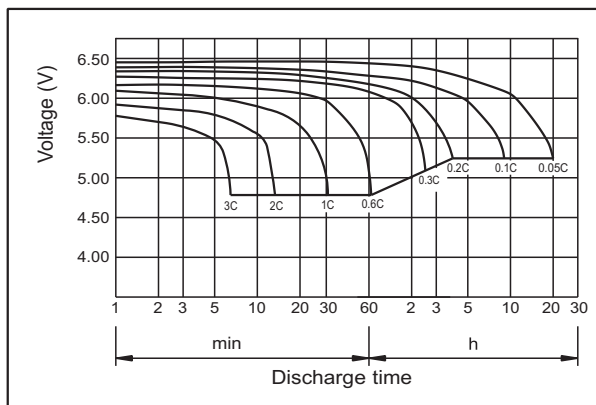


### ● Charging characteristics (25°C)

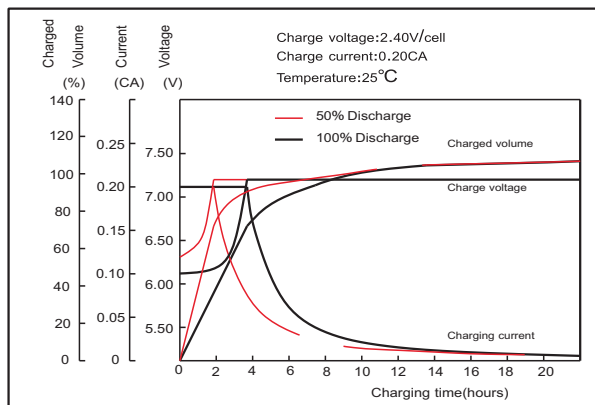


### ● Effect of temperature on capacity

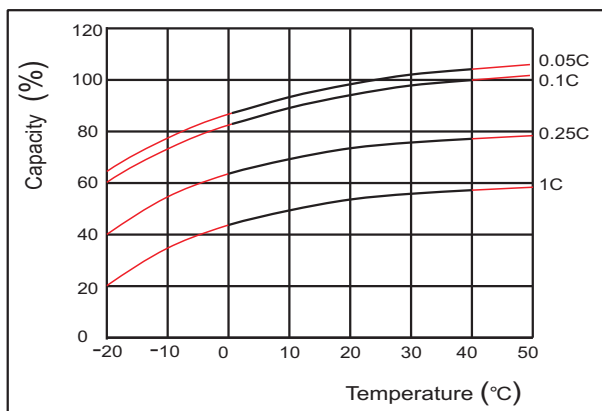


### ● Self-discharge characteristics

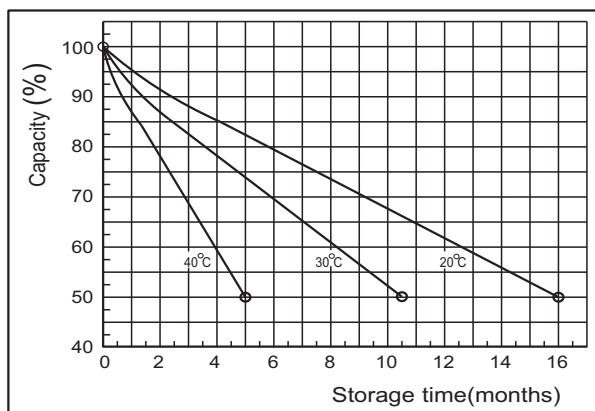


### ● Floating life on temperature

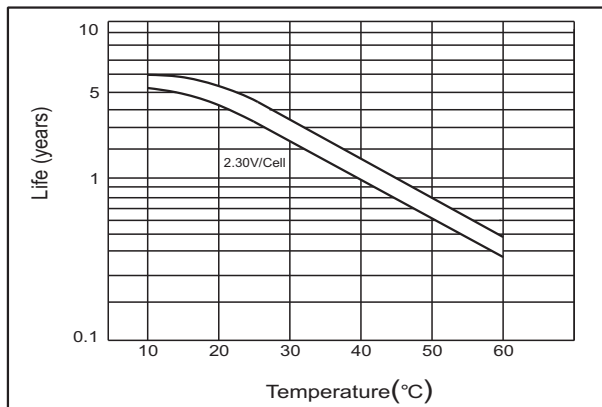


### ● Cycle life on D.O.D.(25°C)

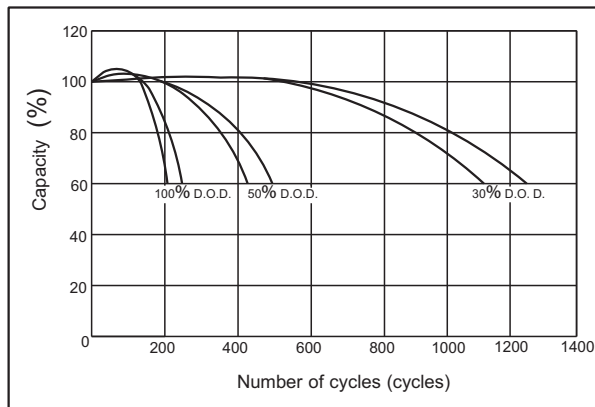

### ● The relationship for OCV and Capacity (25°C)

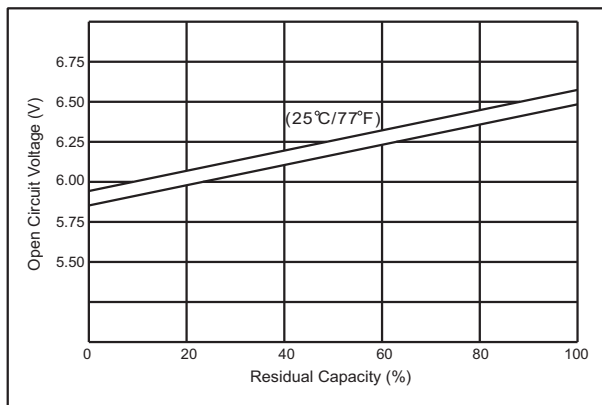

### ● The relationship for Charging voltage and Temperature

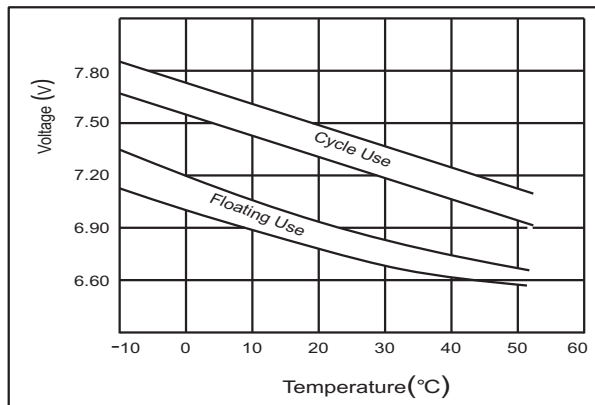

MH47211